

Dynacom WH4K12 12MP IR LED Bullet Camera



- 1/1.7 " Sony Progressive Scan CMOS
- 12MP Resolution
- Triple Streams
- Low bitrate ,Excellent low light performance
- 3D DNR,dWDR,ICR
- ROI,Defog,HLC,Corridor mode,DIS

Model No.	WH4K12
CAMERA	
Image Sensor	1/1.7 " Progressive Scan CMOS
Min. illumination	Color :0.009Lux@(F1.2,AGC ON); B&W: 0Lux@(IR LED ON)
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	Yes
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D/3D
Lens	4.1-12.8mm Motorized
FOV	106°-33.6°
IR LED	8pcs
IR Range	50~70m
IMAGE	
Video Compression	H.265/H.264/MJPEG
Bit Rate (CBR/VBR)	Main stream:500Kb-16Mb ; Sub stream 100Kb-6Mb
Audio Compression	G.711 ,RAW_PCM
Max. Resolution	4000*3000/20fps
Stream	Stream1 4000*3000/20fps;4096x2160/3840x2160/1920x1080/1280x720/30fps Stream2 D1/VGA/CIF Stream3 4000*3000 /4096*2160 /3840*2160 /1920*1080 /1280*720 /D1/VGA/CIF
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC	Yes
9:16 Corridor Mode	Yes
DIS	Auto
ROI	Yes
Defog	Yes
NETWORK	
Network Protocols	HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ICMP ,IGMP, 802.1x, Unicast and Multicast
Alarm Trigger	Perimeter ,Single Virtual Fences ,Double Virtual Fences ,Loiter ,Multi Loiter ,Object Left ,Object Removed, Abnormal Speed ,Converse, Illegal Parking ,Signal Bad ,Motion Detection, Network disconnect, Disk alarm
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware Watch Dog
Web Language	English, Chinese, Polish, Italian, Portuguese, Spanish. Russian, French, Czech, Hungarian
System Compatibility	Onvif



WDR




12 MP



INTERFACE	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	1ch Audio In,1ch Audio Out
Alarm I/O	1ch Alarm In,1ch Alarm Out
RS485	Yes
BNC Output	Yes
Reset Button	Yes
Edge Storage	Micro SD/SDHC/SDXC slot ,Max 128GB
GENERAL	
Power Supply	DC12V/POE
Power Consumption	Max11W
OperatingTemperature	Starting Temperature: -30 °C – 60 °C (-22 °F – 140 °F) Working Temperature:-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Operating Humidity	0% - 90% RH
Ingress Protection	IP66
Approvals	CE / FCC
Product Dimensions	φ110×377mm
Product Weight	1700g

Dimension

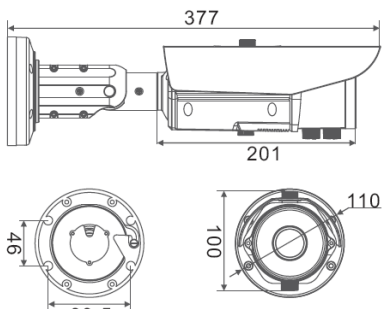

Accessories

