


Dynacom DN6064N SERIES 64CH 960P/36CH 1080P/25CH 3.0MP/16CH 5.0MP 9HDD NVR



- P2P cloud service, including cloud connecting, cloud monitoring, cloud transmitting to access IPC and NVR at any time and any place
- Support Onvif protocol, support High profile S, High profile G, compatible with different IP camera that based on Onvif, RTSP standard
- Support megapixel HD network video preview, storage and playback;
- Support search, playback and backup by event;
- Support all channel image display on one screen at same time, support 4 channels' image display by mainstream, and 4 channels playback;
- Support monitor PTZ on preview mode
- Offer CMS for free

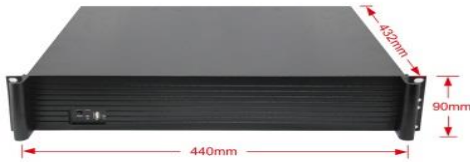

Model Number	Dynacom DN6064N	
Operating System	Embedded LINUX operating system	
Image Code Control	Image code quality adjustable, variable bitstream and constant bitstream optional	
Dual Stream	Each channel can set main stream and sub stream	
Video Standard	1080P(1920×1080)30fps / 960P(1280×960) 30fps /720P(1280×720)30fps	
Monitoring Image Quality	1080P(1920×1080) / 960P(1280×960) /720P(1280×720)	
Image Motion Detection	Each screen can set multiple detection areas and set 6-level sensitivity	
Recording Playback Quality	Any 9ch 960P/720P playback, 4ch 1080P/3MP playback simultaneously	
Region Cover	Every channel can set 4 cover regions (IPC Support)	
Recording Mode	Support manual , auto, dynamic detection, alarm trigger record mode	
Backup Way	Support U disk, USB mobile HDD, USB DVD-RW, network storage and backup (Partly needs IPC Support)	
Operation Way	Mouse	
Local Login	User name and password	
Recording Storage	Local HDD, network	
External Ports	Video Input	① 64×(1280*960) +sub[960*576]+4Ref.+16Play 64ch 1.3MP IP Camera ② 36×(1920*1080)+sub[960*576]+4Ref.+4Play 36ch 2.0MP IP Camera ③ 25×(2048*1536)+sub[960*576]+4Ref.+4Play 25ch 3.0MP IP Camer ④ 16×(2592*1944)+sub[960*576]+4Ref.+4Play 16ch 5.0MP IP Camera
	Audio Input	64/36/25/16 network audio input
	Video Output	1ch VGA+1ch HDMI
	Audio Output	1ch RCA output
	Network Port	2 RJ45,10M/100M/1000M self-adaptive LAN port
	RS485 Port	Full duplex standard 485 port
	USB Port	1USB 3.0 prot, 2 USB 2.0 ports
	Alarm Input	4ch
	Alarm Output	4ch
	Wireless Port	3G, WIFI
HDD	HDD Port	9 SATA+1 E-SATA HDD ports
	MAX Capacity	Each port supports MAX 4TB HDD
Mobile Surveillance	Support(iPhone, Windows Mobile, BlackBerry, Symbian, Android) smart phone	
Power Supply	ATX110-220V 300W 50-60Hz	
Power Consumption	≤30W (without HDD)	
Working Temperature	-10°C~ +55°C	
Working Humidity	10%-90%	
Dimension	Equipment: 440mm×432mm×90mm, Packing: 539mm×550mm×225mm	
Weight(without HDD)	N.W.: 7.4Kg; with packing: 9.8Kg	
Outside Carton	2pcs/carton. 555mm×545mm×470mm; weight: 21Kg	
Installation Way	Desktop Installation	